

AnaJet Driver Update Instructions (Windows XP Operating System)


Release Note for Anaprint Driver Ver. 3.2 – April 15, 2008

A. Download and Extract New Driver


1. Download the new driver.
2. Extract the INF folder to the Desktop

B. Delete Old Driver:

1. Go to Control Panel
2. Open Printers and Faxes

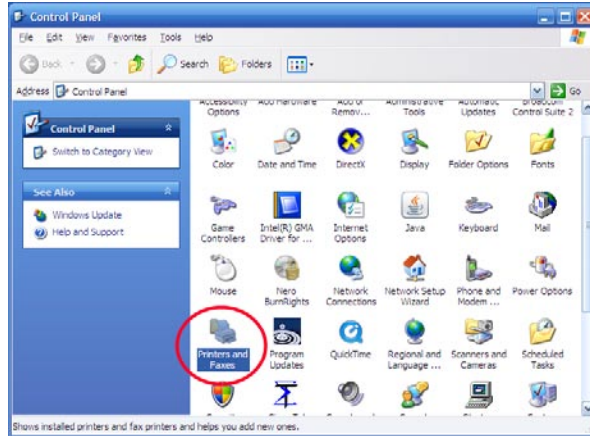

3. Right-Click on the AnaJet 125 printer and choose Delete.

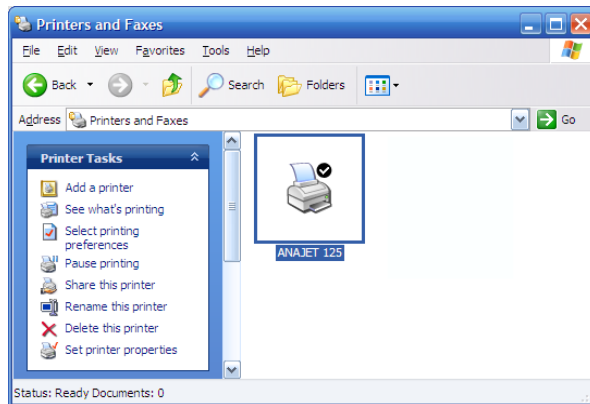


AnaJet Driver Update Instructions (Windows XP Operating System)

C. Installing New Driver


1. Unplug USB cable from Printer side **OR** PC side
2. Re-plug in USB cable
3. Found New Hardware Wizard will appear. For the first screen, choose “No, not at this time” then click Next



4. Choose “Install from a list or specific location (Advanced)” then click Next

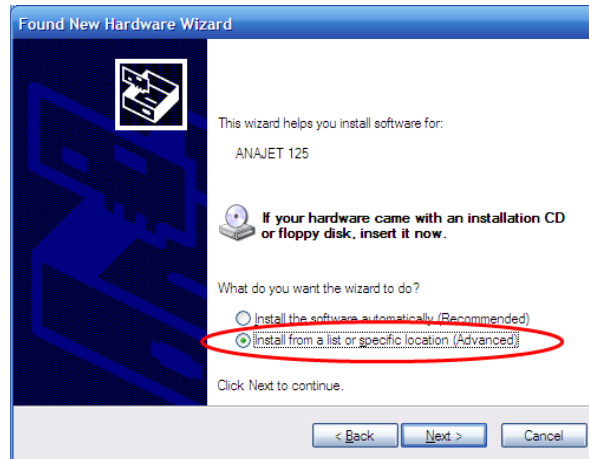


5. Choose “Don't search. I will choose the driver to install.” then click Next

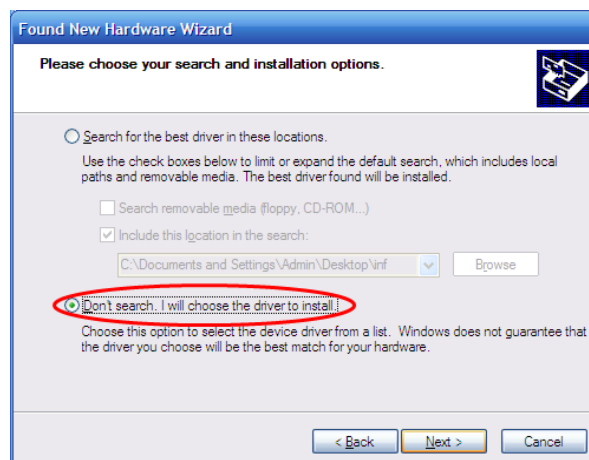


AnaJet Driver Update Instructions (Windows XP Operating System)


6. Click on Have Disk

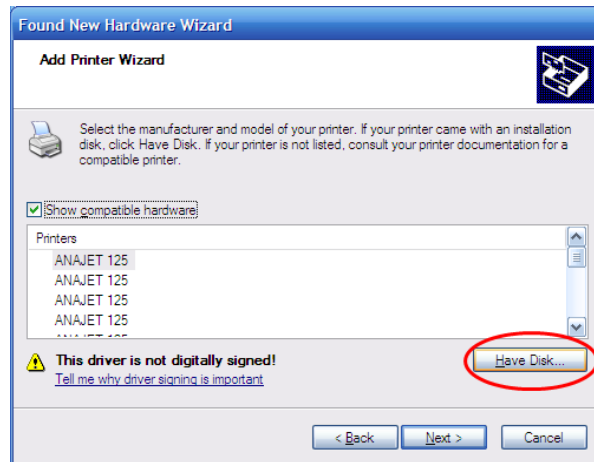

7. Click on Browse

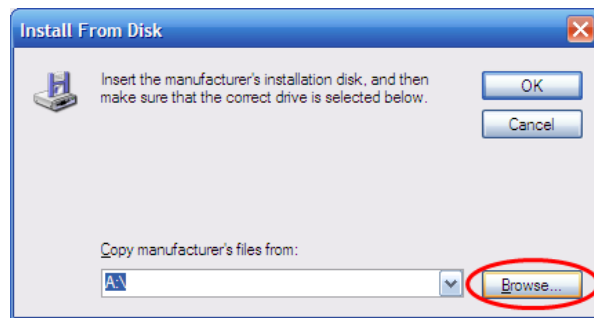


8. Browse to the Desktop, then double click on the folder "INF"

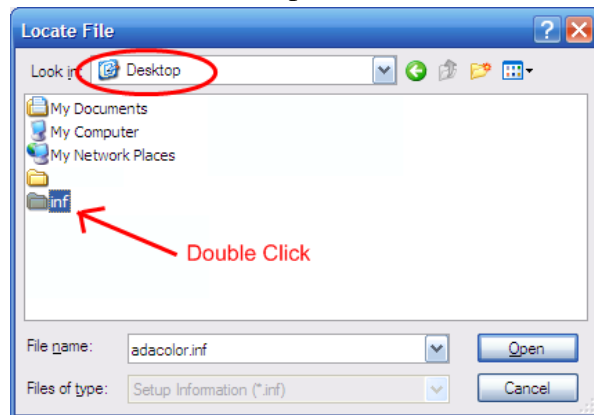


AnaJet Driver Update Instructions (Windows XP Operating System)


9. Double click on “adacolor.inf”

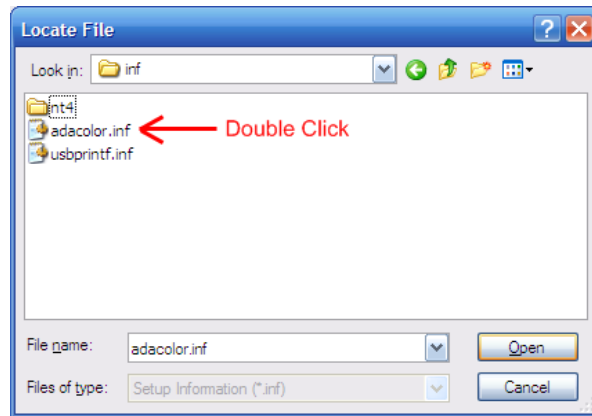

10. Click on OK

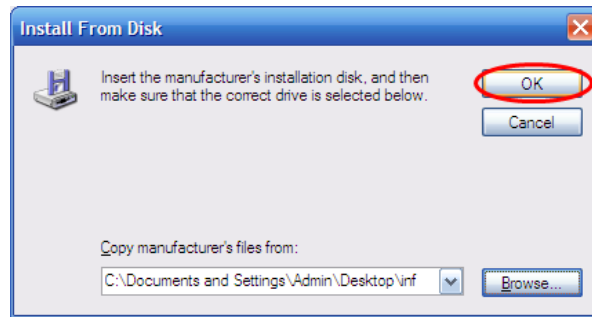


11. Click on Next

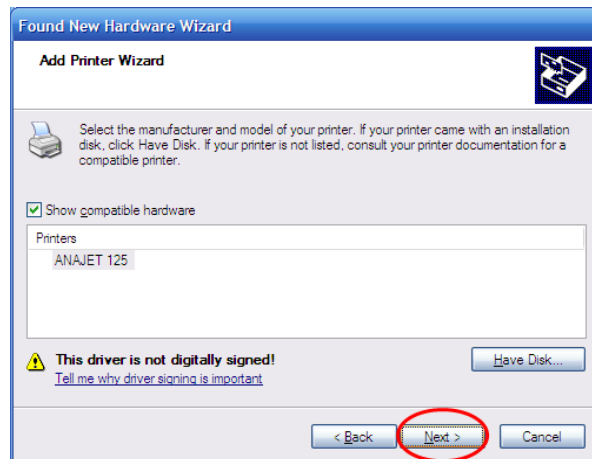

AnaJet Driver Update Instructions (Windows XP Operating System)

12. When prompted, click on Continue Anyway

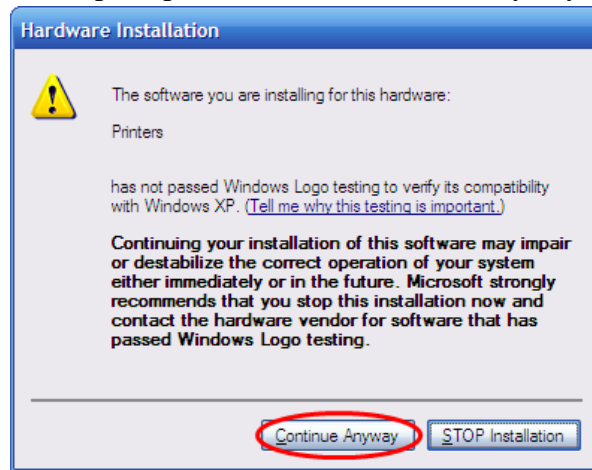

13. Click on Finish

